

ER6-1400

ER6-1400,
Maxium payload 6 kg with maxium reach 1433 mm.

- Highlights**
A comprehensive arc welding process software can be integrated to meet the requirements of automatic welding in various scenarios;
Avaliable version for the education industry with disassembly possibility to meet the education requirements with intelligent manufacturing focus.
- Applications**
It can be used in handling, machine tending, arc welding, etc.
- Industries**
Suitable for plastic, metal parts, education and other industries.



EFORT Intelligent Robot Co., Ltd.
PHONE: (00 86) 400-052-8877
ADDRESS: No. 96, Wanchun East Road, Wuhu, China
(Anhui) Pilot Free Trade Zone
WWW.EFORT.COM.CN


EFORT

SPECIFICATIONS


Model		ER6-1400
Type		Articulated
Controlled axes		6 Axes
Max. payload on wrist		6 kg
Repeatability		±0.05 mm
Robot weight		145 kg
Reach		1433 mm
Robot IP grade		IP54 / IP67 (Wrist)
Cabinet IP grade		IP54
Drive mode		AC servo drive
Installation		Floor, Upside-down, Wall, Angle
Installation enviroment	Ambient temperature	0~45 °C
	Ambient humidity	RH≤80% (No dew nor frost allowed)
	Vibration acceleration	4.9 m/s ² (<0.5 G)

Allowable load moment at wrist	J4	12 N·m
	J5	12 N·m
	J6	6 N·m
Allowable load inertia at wrist	J4	0.4 kg·m ²
	J5	0.4 kg·m ²
	J6	0.2 kg·m ²
Maximum speed	J1	175°/sec
	J2	175°/sec
	J3	185°/sec
	J4	330°/sec
	J5	360°/sec
	J6	600°/sec
Motion range	J1	±165°
	J2	+75°/-135°
	J3	+170°/-83°
	J4	±180°
	J5	±130°
	J6	±360°


OPERATING SPACE

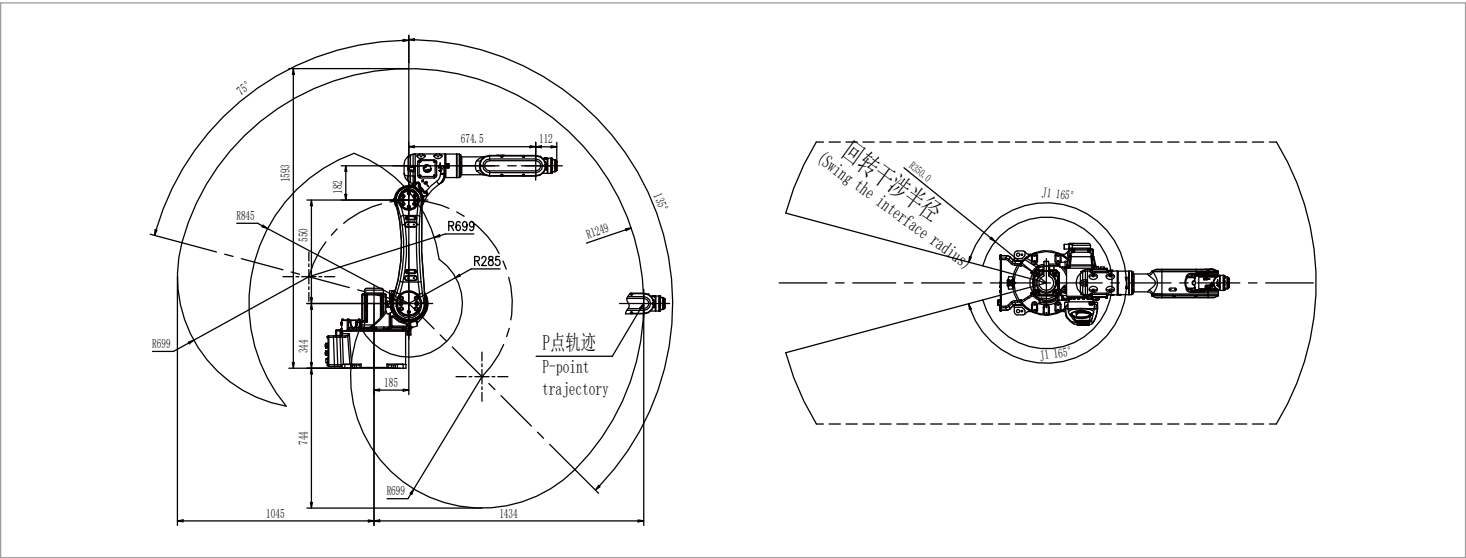

BASE MOUNTING SIZE

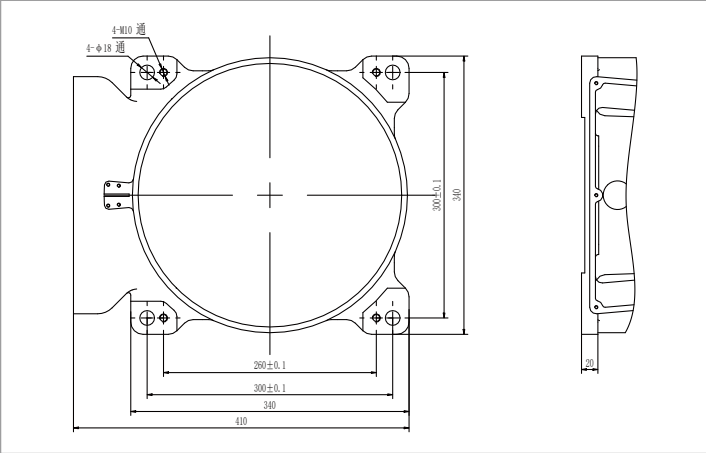

END FLANGE MOUNTING SIZE

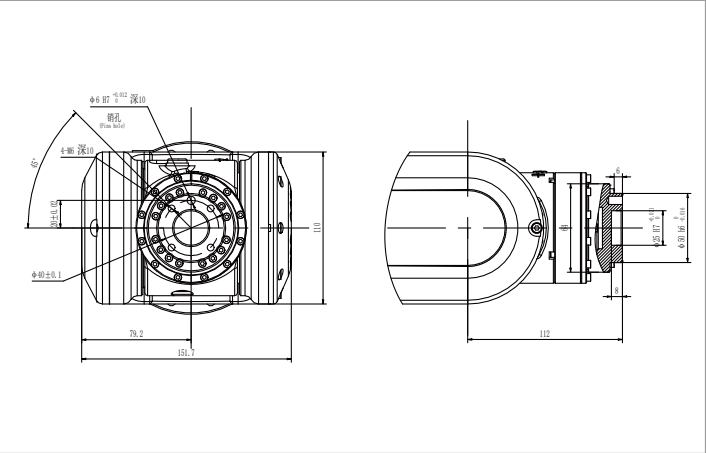

*The final interpretation right belongs to EFORT Intelligent Robot Co., Ltd. Any updates will be made without prior notice. Information Release Time 2025/04