


ER15-1400

ER15-1400,
Maxium payload 15 kg with maxium reach 1420 mm.

- Highlights
- Thanks to the optimization of stiffness and inertia brought by the new mechanical design, with advanced trajectory algorithm. The takt improved by 20%-30%; Compact cabinet design helps customers deploy the production line with more flexibility; IP67 wrist, high protection grade, to overcome harsh environment.

- Applications
- It can be used in handling operations, assembling, grinding, polishing, deburring, etc.

- Industries
- Suitable for PCB, metal parts, photovoltaic and other industries.

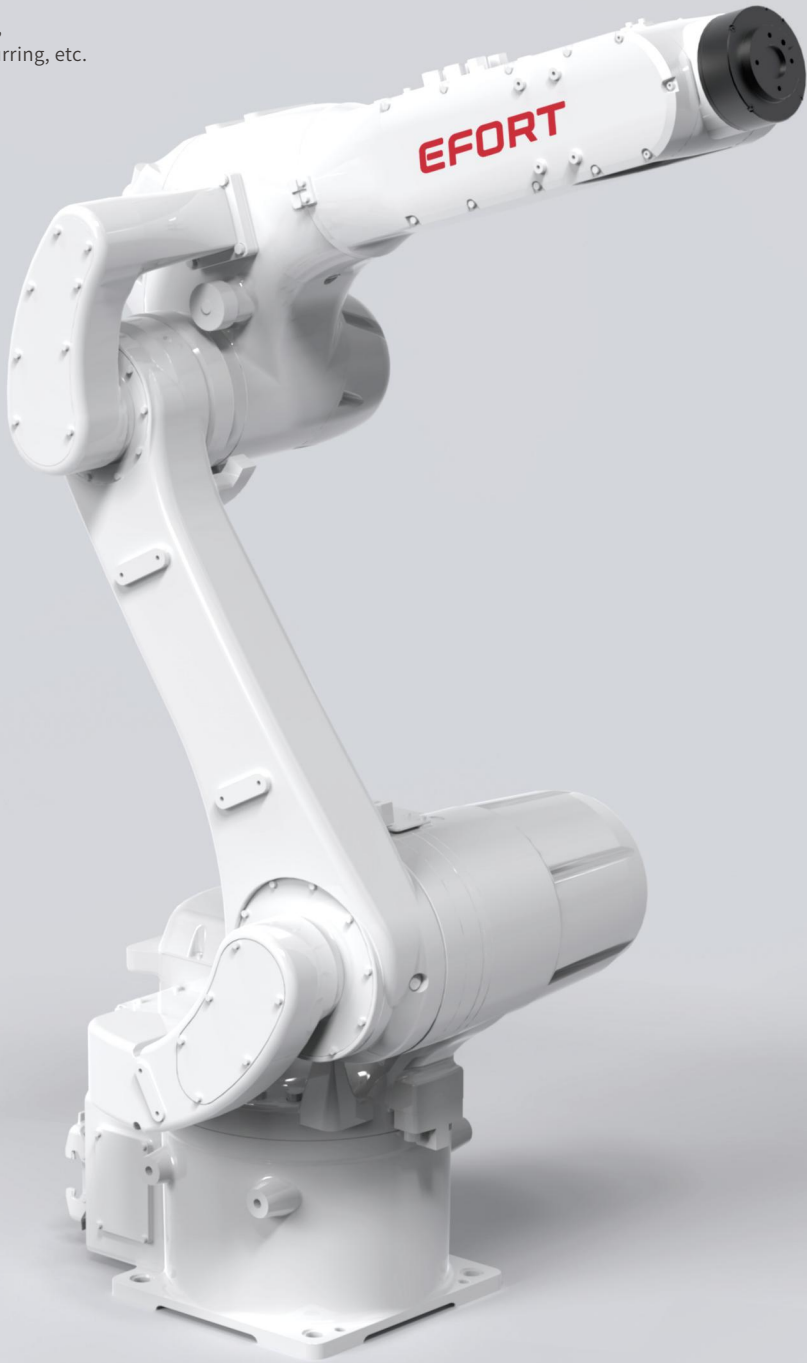

EFORT Intelligent Robot Co., Ltd.
PHONE: (00 86) 400-052-8877
ADDRESS: No. 96, Wanchun East Road, Wuhu, China
(Anhui) Pilot Free Trade Zone
WWW.EFORT.COM.CN


EFORT

SPECIFICATIONS


Model		ER15-1400
Type		Articulated
Controlled axes		6 Axes
Max. payload on wrist		15 kg
Repeatability		±0.03 mm
Robot weight		150 kg
Reach		1420 mm
Robot IP grade		IP65/IP67 (Wrist)
Cabinet IP grade		IP20/IP54 (Optional)
Drive mode		AC servo drive
Installation		Floor, Upside-down, Wall, Angle
Installation enviroment	Ambient temperature	0~45 °C
	Ambient humidity	RH≤80% (No dew nor frost allowed)
	Vibration acceleration	4.9 m/s ² (<0.5 G)

Allowable load moment at wrist	J4	42 N•m
	J5	42 N•m
	J6	20 N•m
Allowable load inertia at wrist	J4	2 kg•m ²
	J5	2 kg•m ²
	J6	0.7 kg•m ²
Maximum speed	J1	260°/sec
	J2	255°/sec
	J3	210°/sec
	J4	450°/sec
	J5	450°/sec
	J6	600°/sec
Motion range	J1	±170°
	J2	+90°-160°
	J3	+175°/-85°
	J4	±190°
	J5	±130°
	J6	±360°


OPERATING SPACE

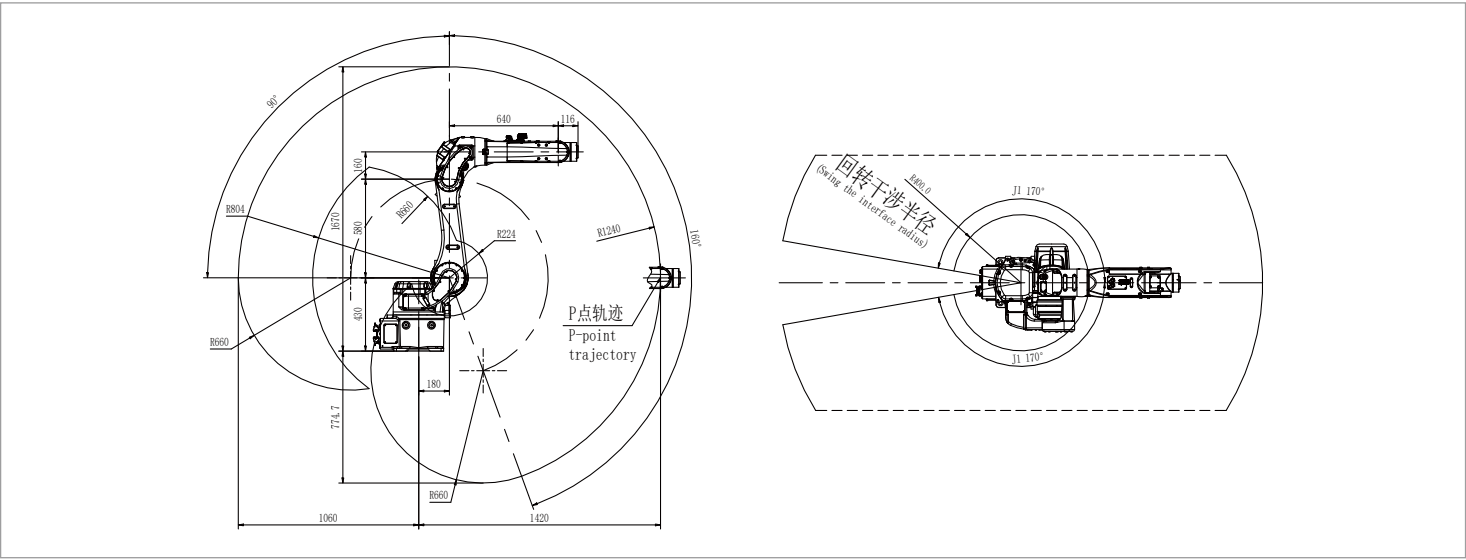

BASE MOUNTING SIZE

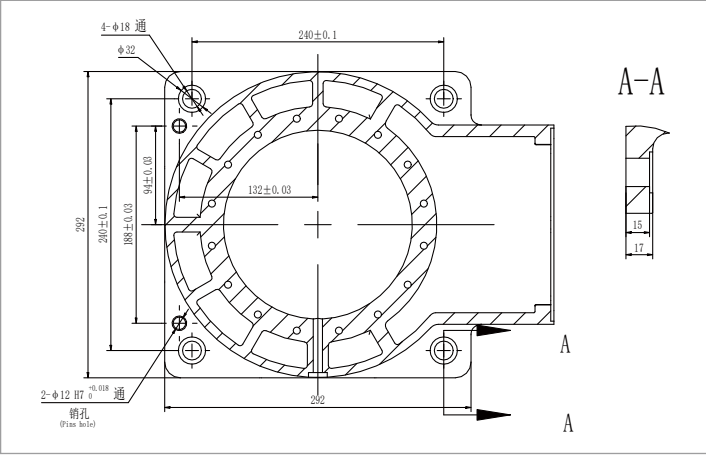

END FLANGE MOUNTING SIZE

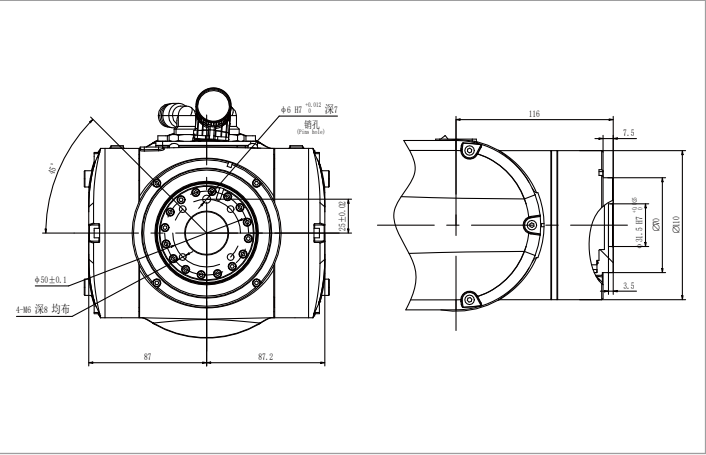

*The final interpretation right belongs to EFORT Intelligent Robot Co., Ltd. Any updates will be made without prior notice.