


ER16-3-900

ER16-3-900,
Maxium payload 16 kg with maxium reach 944 mm.

■ **Highlights**
High protection level IP65 of the robor body help customers easy to face dusty, oil misty, high humidity and other harsh environment;
Thanks to the high stiffness transmission design and advanced trajectory algorithm, the improved robot accuracy performance helps customers to face variety of application scenarios.

■ **Applications**
It can be used in handling operations.

■ **Industries**
Suitable for PCB, electronic manufacturing, plastic, metal parts and other industries.

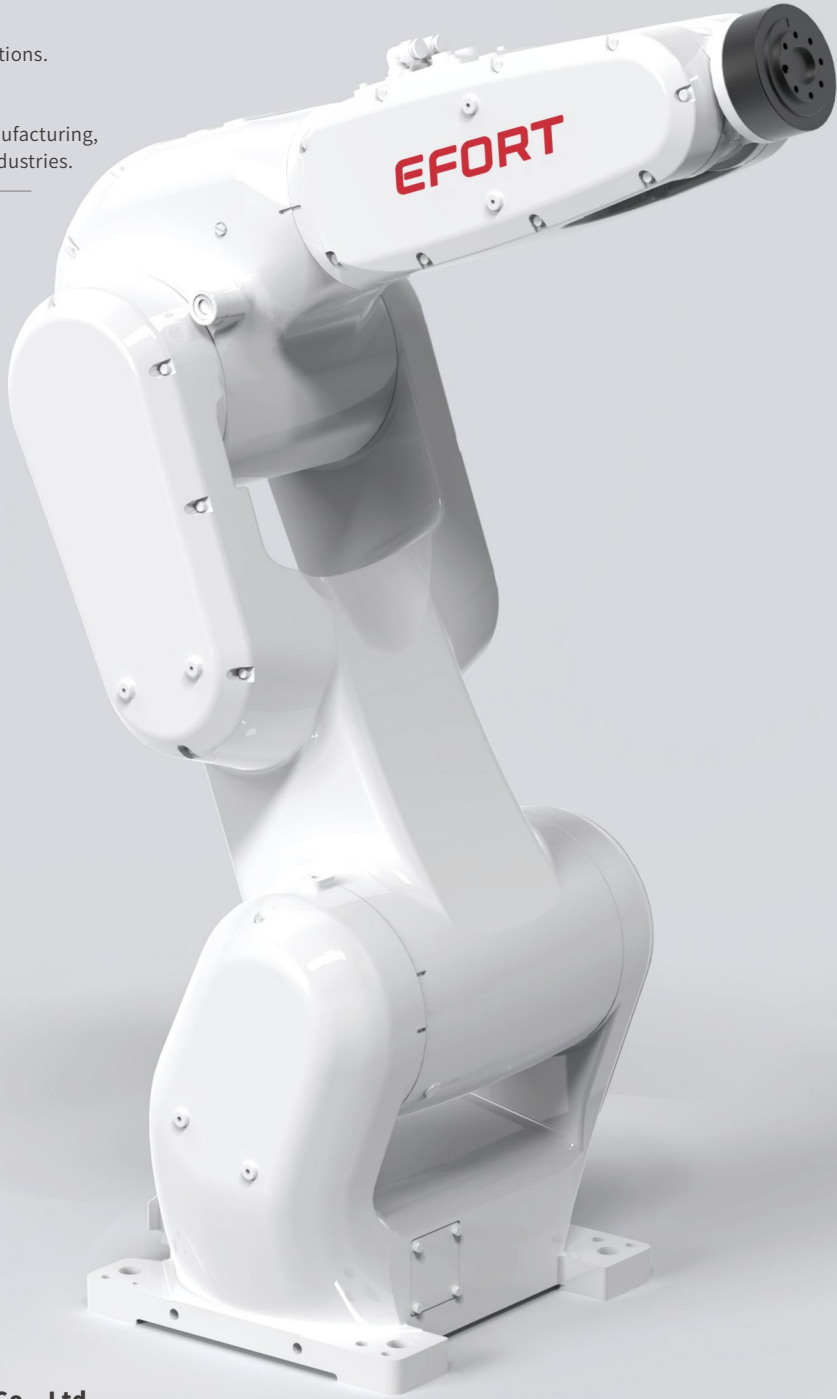

EFORT Intelligent Robot Co., Ltd.
PHONE: (00 86) 400-052-8877
ADDRESS: No. 96, Wanchun East Road, Wuhu, China
(Anhui) Pilot Free Trade Zone
WWW.EFORT.COM.CN


EFORT

SPECIFICATIONS


Model	ER16-3-900
Type	Articulated
Controlled axes	3 Axes
Max. payload on wrist	16 kg
Repeatability	±0.03 mm
Robot weight	56 kg
Reach	944 mm
Robot IP grade	IP65
Cabinet IP grade	IP20 / IP54 (Optional)
Drive mode	AC servo drive
Installation	Upside-down

Installation enviroment	Ambient temperature	0~45 °C
	Ambient humidity	RH≤80% (No dew nor frost allowed)
	Vibration acceleration	4.9 m/s ² (<0.5 G)
Allowable load moment at wrist	J 3	25 N·m
Allowable load inertia at wrist	J 3	0.78 kg·m ²
Maximum speed	J 1	245°/sec
	J 2	265°/sec
	J 3	400°/sec
Motion range	J 1	+100°/-130°
	J 2	+193°/-75°
	J 3	±120°


OPERATING SPACE

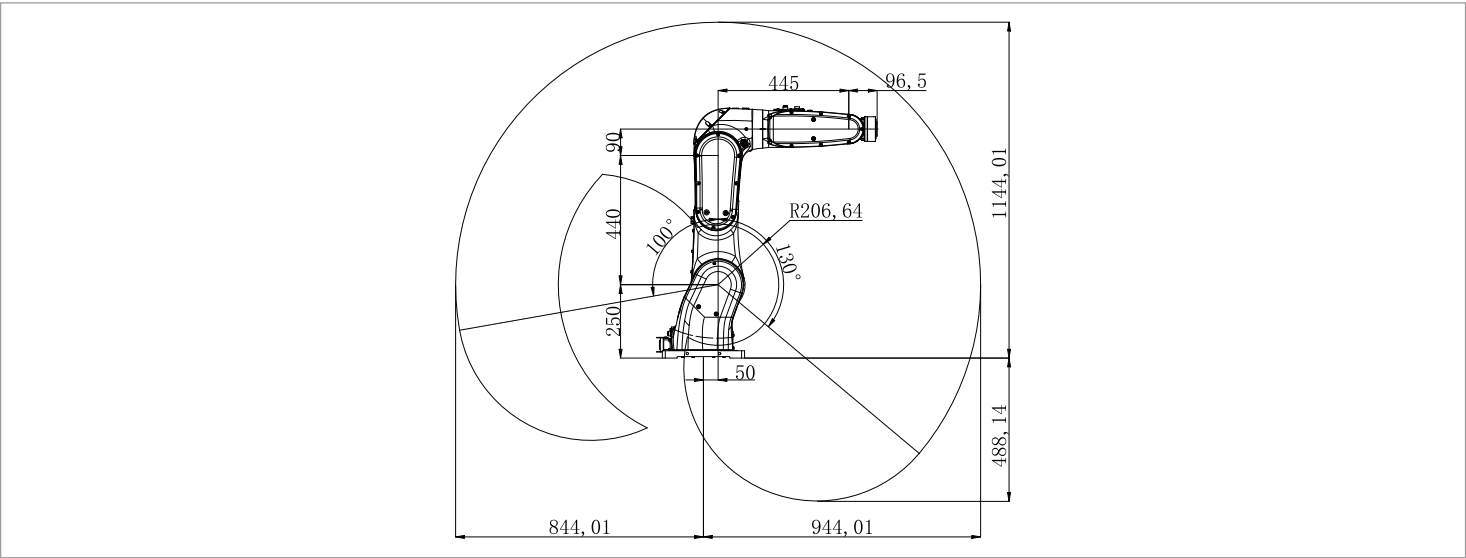

BASE MOUNTING SIZE

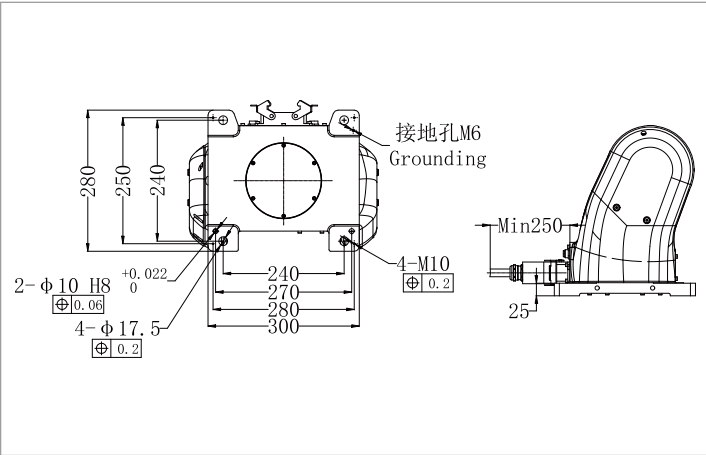

END FLANGE MOUNTING SIZE

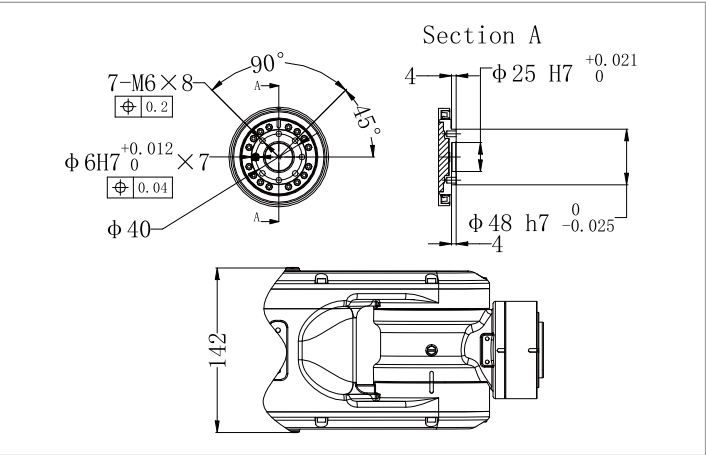

*The final interpretation right belongs to EFORT Intelligent Robot Co., Ltd. Any updates will be made without prior notice.