

EFORT

ESR30-1000Z42

ESR30-1000Z42,
Maxium payload 30 kg with maxium reach 1000 mm.

- **Highlights**
1. High rhythm and high precision
The fastest standard cycle time can reach 0.38 s, and the robot positioning accuracy can reach 0.025 mm.
2. High rigidity and low vibration
Robot body mode and rigidity enhancement, combined with vibration suppression and active vibration suppression functions, effectively reduce vibration.
3. Easy to maintain and scalable
The detachable structure of cables and batteries allows for the replacement of robots inside the device.
- **Applications**
- It can be used in handling, sorting, assembly, etc.
- **Industries**
- Suitable for industries such as lithium batteries, automotive electronics, and photovoltaics.




SPECIFICATIONS


Model		ESR30-1000Z42
Reach		1000 mm
Max. payload on wrist	Rated	10 kg
	Maximum	30 kg
Robot weight		72 kg
Maximum speed	J1+J2	10300 mm/sec
	J3	1100 mm/sec
	J4	600°/sec
Motion range	J1	±145°
	J2	±145°
	J3	420 mm
	J4	±360°
Repeatability	J1+J2	±0.025 mm
	J3	±0.01 mm
	J4	±0.01°
Standard cycle time		0.38 s
J4 allowable moment of inertia	Rated	0.5 kg•m ²
	Maximum	1 kg•m ²
Electric lines		D-Sub 9-Pin+15-Pin
Pneumatic lines		φ4 mmx2,φ6 mmx2
J3 downward force		400 N
Installation		Floor
Installation enviroment	Ambient temperature	5~40℃
	Ambient humidity	RH≤80% (No dew nor frost allowed)

*The final interpretation right belongs to EFORT Intelligent Robot Co., Ltd. Any updates will be made without prior notice.


OPERATING SPACE

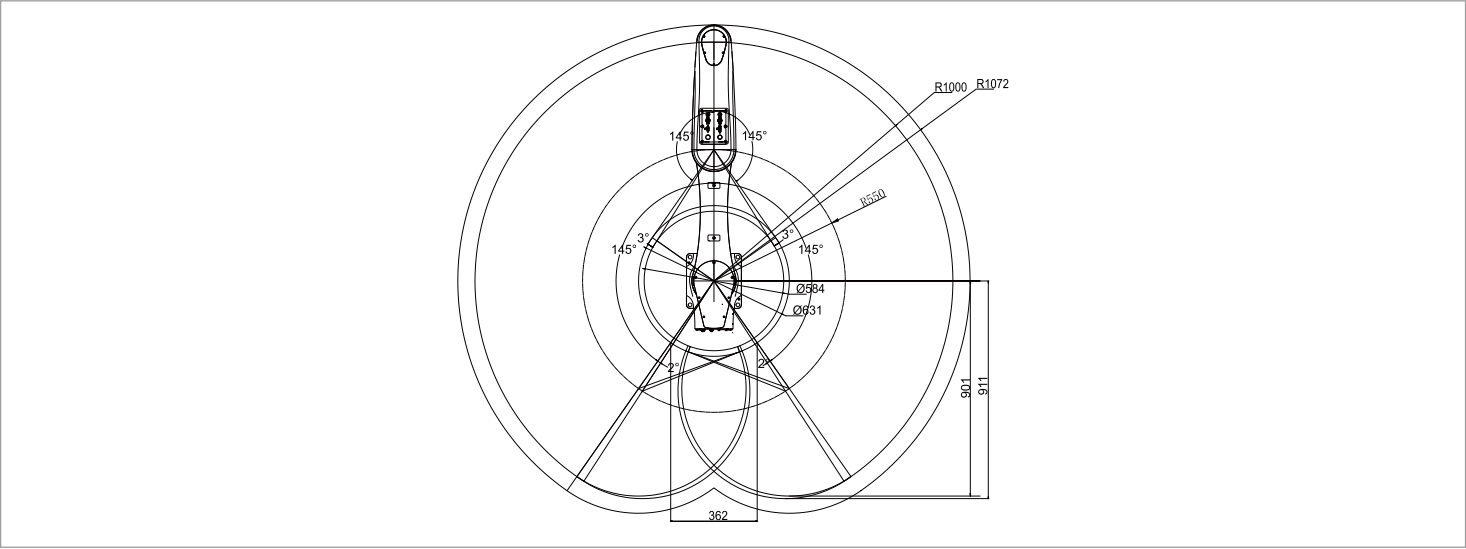

BASE MOUNTING SIZE

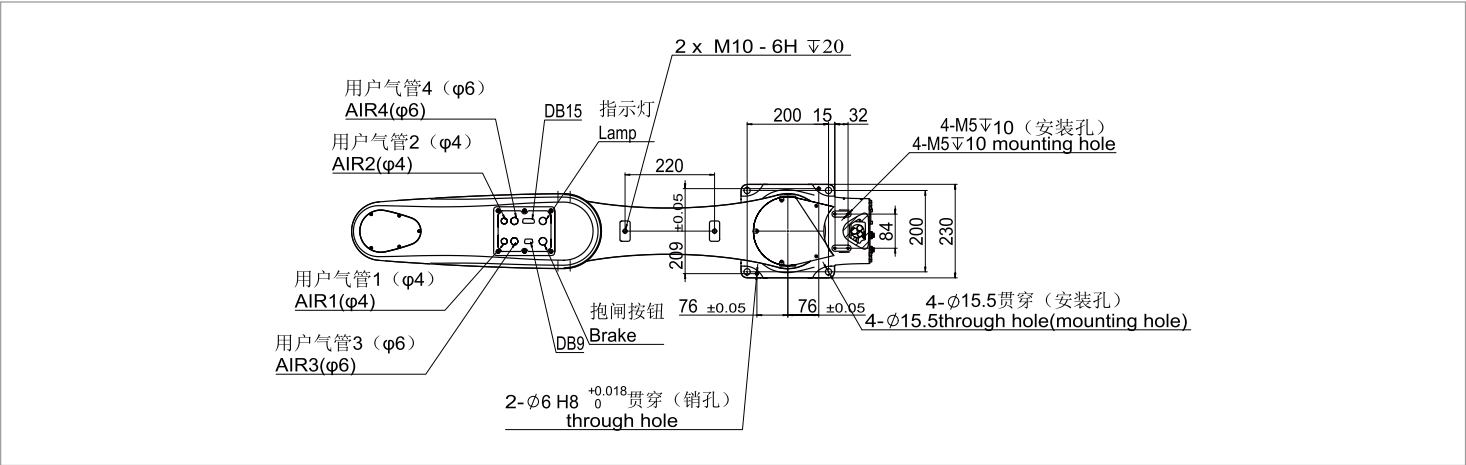

END FLANGE MOUNTING SIZE

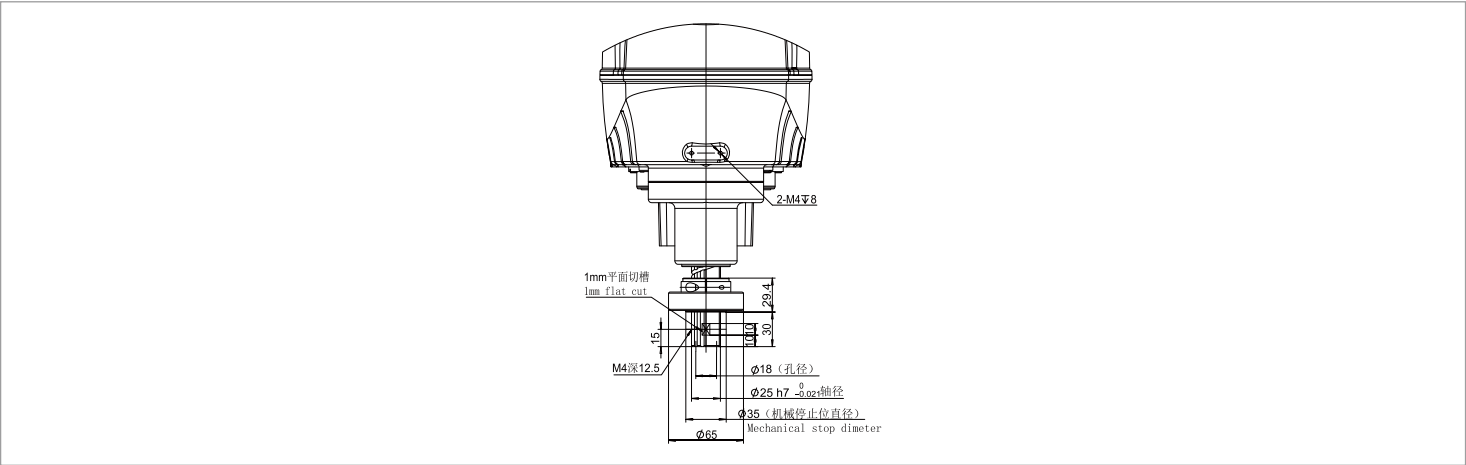

Information Release Time 2025/04

PHONE: (00 86) 400-052-8877
ADDRESS: No. 96, Wanchun East Road, Wuhu,
China (Anhui) Pilot Free Trade Zone
WWW.EFORT.COM.CN

EFORT Intelligent Robot Co., Ltd.